

LAVA[®] 2.0 INFRARED HEATING PANEL

With 2.0 you are plug & play ready.

The LAVA[®]2.0 design infrared heating panels work particularly efficiently and save energy. The 6 mm thick surface material made of safety glass, special ceramic or fine stone, as well as 2 temperature limiters in all panels ensure safety at all times. The innovative technology makes the surfaces a very good radiation emitter. In combination with the even heat distribution on the surface, the optimally insulated back surface guarantees a high radiation efficiency and thus maximum infrared heat radiation to the front into the room.

The frameless construction provides a modern design. There are four surfaces (STEEL/GLAS/CERAMIC/STONE) and up to 6 powers to choose from, just as you'd like.


The practical plug & play box at the rear of all LAVA[®] 2.0 models enables simple installation of a controller, whether directly on the unit - by radio - or by means of a wired controller (see also page 84).

TECHNICAL DATA


- > Voltage: 230 V
- > IP rating: IP X4
- > IEC protection class: I
- > Connection cable: Plug-in cable: 1m
- > Wall mounting: Horizontal or vertical
- > Warranty: 5 years

PRODUCT ADVANTAGES

- + Highest radiation efficiency thanks to maximum radiation to the front
 - homogeneous surface temperature
 - large surface
 - optimal-insulated rear side (approx. 40 °C for wall mounting)
- + Frameless Infinity Design
- + Plug & Play control for easy, individual regulation
- + High safety level against breaking and Overheating
- + No service, no maintenance necessary
- + Magnetic field free

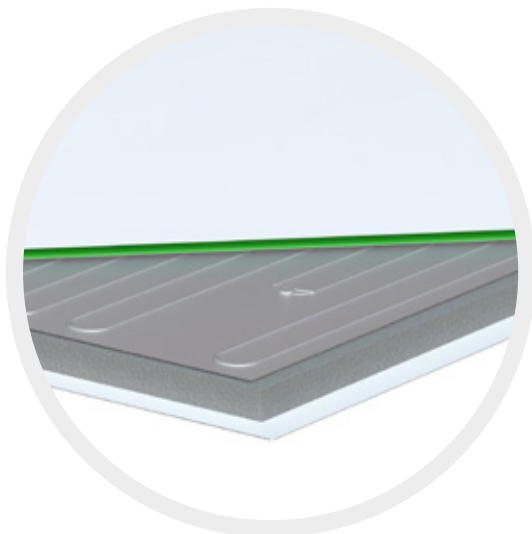

LAVA[®] structure

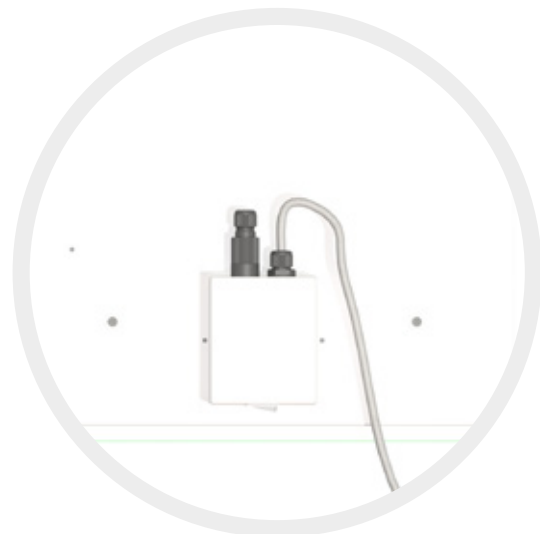

Plug & Play box at the back



TECHNICAL DATA



- > Output: 250, 500, 750, 1000 W
- > Surface temp.: Max. 95 °C at standard internal temp.
- > Surface: Sheet steel
- > Device/install. depth: 26/57 mm
- > Certification: TÜV

LAVA[®] STEEL 2.0 infrared heating panel, sheet steel, white (W) RAL9016

RG: I1 | LZ: ex stock

Type	Item no.	Output (W)	Length (mm)	Height (mm)	Weight (kg)	Price €
LAVA2-STEEL-250-W	39618	250	500	630	6	478.10
LAVA2-STEEL-500-W	39619	500	900	630	10	584.00
LAVA2-STEEL-750-W	39620	750	1300	630	14.5	716.40
LAVA2-STEEL-1000-W	39621	1000	1600	630	18	865.80