


# SOLAMAGIC® S3 CEILING INSTALLATION

Premium infrared heater with frame

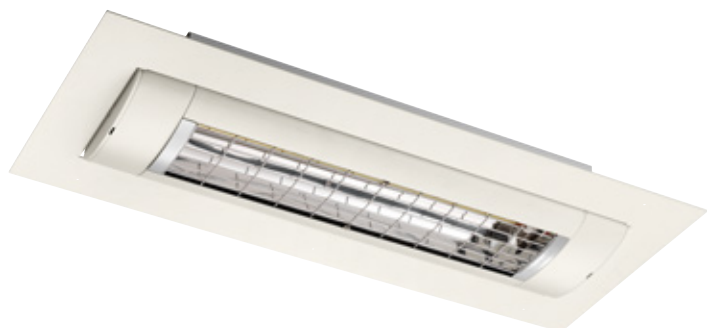

The SOLAMAGIC® S3 recessed ceiling heater enables safe and discreet installation of the premium infrared heaters in a wide variety of ceiling constructions. The casing and the frame are made of high quality aluminum. The device is equipped with a Solastar-G2 heating element, which, in addition to high efficiency, has a very long service life (approx. 5,000 operating hours) and has a particularly low residual light content. Especially in outdoor areas, infrared heaters allow very flexible applications and guarantee constant, pleasant heat zones. Due to its short wavelength, infrared heat radiation penetrates the air particularly efficiently and thus creates high operating cost savings compared to gas heaters.

## TECHNICAL DATA

- > Voltage: 230 V
- > Heating element: Solastar-G2
- > Output: 2500 W\*
- > Colours: White, titanium, nano anthracite
- > Special colour: possible against surcharge
- > IP rating: IP 44
- > Connection cable: 40 cm + 180 cm plug-in cable for installation connection
- > Certification: TÜV

## PRODUCT ADVANTAGES

- + Innovative Solastar heating element
- + Can be integrated into ceilings
- + 20° tiltable
- + Space-saving
- + Maximum heat radiation to the front thanks to innovative reflector design
- + Fast heat at the touch of a button
- + Easy installation

\* Attention: increased starting current!

## SOLAMAGIC® S3 recessed ceiling premium infrared heater

RG: R2 | LZ: 3 weeks

Type	Art. No.	Output (W)	Length (mm)		Width (mm)		Depth (mm)		Price €
			With frame	Part	With frame	Parts	Installation	Overhang	
<b>SM-S3-2500-D-W</b>	9300353	2500	900	850	370	300	100	31	<b>1090.40</b>
<b>SM-S3-2500-D-T</b>	9300354	2500	900	850	370	300	100	31	<b>1090.40</b>
<b>SM-S3-2500-D-NA</b>	9300355	2500	900	850	370	300	100	31	<b>1090.40</b>

W: white T: titanium NA: nano anthracite



Tilttable up to 20°

Low installation depth

**ETHERMA TIP:** SOLAMAGIC® replacement tubes can be found on page 45.